


Ubbelohde Viscometer

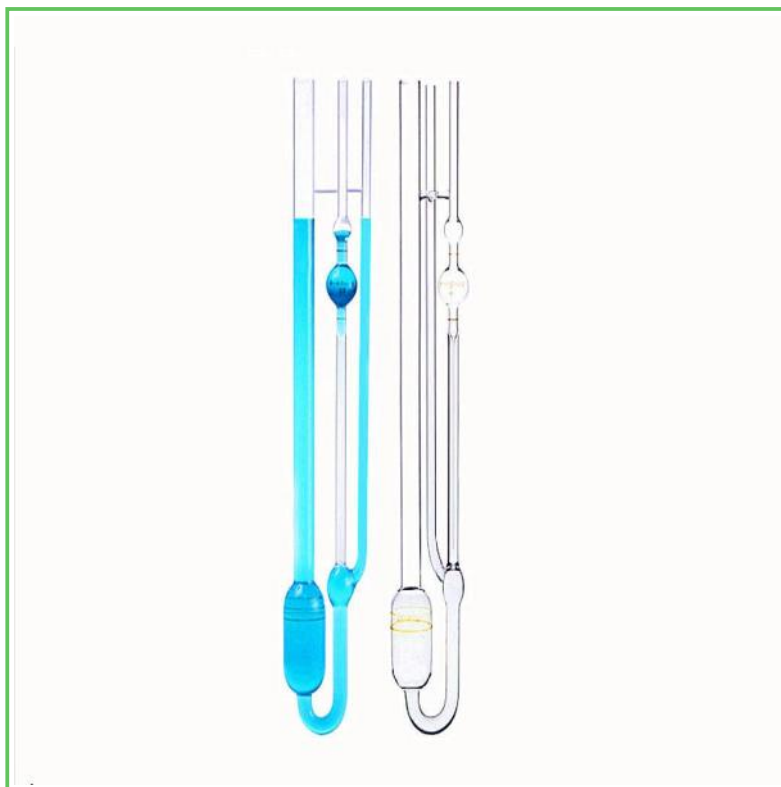

Calibrated DIN Ubbelohde Viscometer

Size Code: Ic

Total Length: 290 mm

Capillary: 8.8 cm

Capillary Inner Diameter: 0.84 mm

Kinetic viscosity range: 3-30 mm²/s

Nominal Viscometer Constant: 0.03

Small Ball volume: 4 mL

Volume of bulb C: 5,7 mL

Calibration certificate included

Method Details

ISO 3104	Kinematic Viscosity of Transparent and Opaque Liquids and the Calculation of Dynamic Viscosity
ASTM D446	Standard specifications and operating

	instructions for glass capillary kinematic viscometers
ISO 3105	Glass capillary kinematic viscometers
IP 71	Determination of kinematic viscosity
ASTM D445	Method for Kinematic Viscosity of Transparent and Opaque Liquids